



# LAMP SERIES

## 6x6 Led Built-in Type

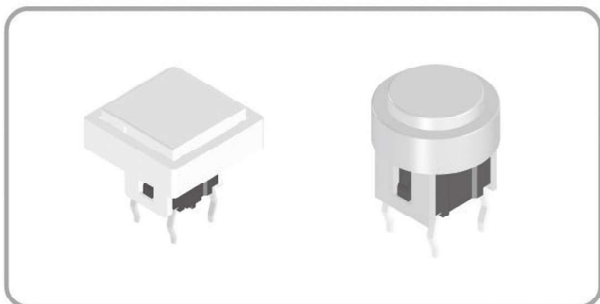

### HOW TO ORDER

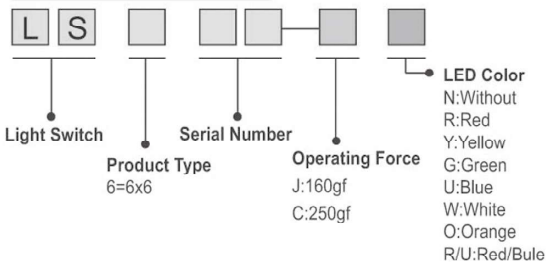

### Specification

Items		Standard
Operating temperature range		-25°C to +85°C
Electrical performance	Rating	50mA. 30V DC
	Insulation resistance	100MΩ min. 250V DC
	Dielectric strength	AC250V(50-60Hz) for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	100,000 Cycles Min
Mechanical performance	Operating force	J:160gf C:250gf
	Travel	0.25 ± 0.1mm

### Diagram

No.	Dimensions	Circuit Diagram
		Pad Layout
1	<p>● LS623</p>	<p>Circuit Diagram</p> <p>PCB Layout Recommended</p>
2	<p>● LS624</p>	<p>Circuit Diagram</p> <p>PCB Layout Recommended</p>